

ME-WL Series

Small, Long Life

Low Impedance




- 105°C 4,000 to 5,000hours
- Non solvent proof

Specifications

Items	Condition	Specifications										
Rated voltage (V)	—	6.3	10	16	25	35	50	63	100			
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	79	125			
Category temperature range (°C)	—	-40 to +105										
Capacitance tolerance (%)	120Hz/20°C	M : ±20										
Dissipation Factor (tan δ)	tanδ (max.) 120Hz/20°C	0.22	0.19	0.16	0.14	0.12	0.10	0.10	0.10	0.10		
Leakage current (LC)	μA/after 2minutes (max.), 20°C	The greater value of either 0.01CV or 3										
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	4	3	2	2	2	2	2	2	2	
		-40°C Z/Z _{20°C}	8	6	4	3	3	3	3	3	3	
Endurance	105°C rated voltage applied (With the rated ripple current)	Test	4,000hours		5,000hours							
		ΔC/C	Within ±25% of the initial value									
		tanδ	Less than 200% of the specified value									
		LC	Less than the specified value									

Dimensions

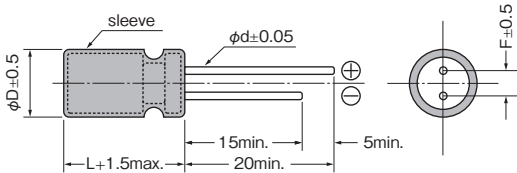

(Unit : mm)

	5	6.3
φD	5	6.3
F	2.0	2.5
φd	0.5	0.5

A pressure relief vent is provided for φD=6.3 or bigger

Size, Impedance, Rated Ripple Current

μF \ V	6.3			10			16			25		
47										5×11	0.58	210
56							5×11	0.69	210			
100				5×11	0.58	210	5×11	0.69	210	6.3×11	0.26	340
120							6.3×11	0.26	340			
150	5×11	0.69	210	5×11	0.69	210						
220				6.3×11	0.26	340	6.3×11	0.26	340			
330	6.3×11	0.26	340	6.3×11	0.26	340						
470	6.3×11	0.26	340									

μF \ V	35			50			63			100		
2.2				5×11	2.50	43						
3.3				5×11	2.20	53						
4.7				5×11	1.90	88						
6.8										5×11	1.40	125
10				5×11	1.50	100						
15							5×11	1.06	165	6.3×11	0.57	205
18							5×11	1.06	165			
22				5×11	0.84	180	6.3×11	0.42	265			
27				5×11	0.84	180						
33	5×11	0.69	210				6.3×11	0.42	265			
47	5×11	0.69	210	6.3×11	0.40	250						
56	6.3×11	0.26	340	6.3×11	0.36	295						
100	6.3×11	0.26	340									

Please refer to page 14 for ripple current frequency coefficients.

Impedance(Ω) max. at 100kHz, 20°C
 Rated ripple current mA Arms(100kHz, 105°C)
 Case size:φDxL(mm)

Part number

