

ME-WA Series

105°C, Small, Long Life

Low Impedance, High Ripple Current

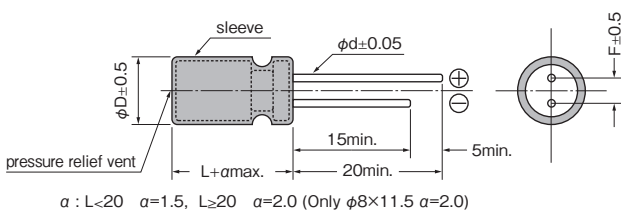


- 105°C 8,000 to 10,000hours
- Non solvent proof

Specifications

Items	Condition	Specifications								
Rated voltage (V)	—	6.3	10	16	25	35	50	63		
Surge voltage (V)	Room temperature	8.0	13	20	32	44	63	79		
Category temperature range (°C)	—	-40 to +105								
Capacitance tolerance (%)	120Hz/20°C	M : ±20								
Dissipation Factor (tan δ)	tanδ(max.) 120Hz/20°C	0.22	0.19	0.16	0.14	0.12	0.10	0.10		
Leakage current (LC)	μA/after 2minutes (max.), 20°C	Exceeding 1,000μF, +0.02 every 1,000μF								
Impedance ratio at low temperature	Based on the value at 120Hz, +20°C	-25°C Z/Z _{20°C}	2	2	2	2	2	2	2	
		-40°C Z/Z _{20°C}	3	3	3	3	3	3	3	
		Test	φ8 : 8,000hours, φ10 to φ16 : 10,000hours							
		ΔC/C	Within ±25% of the initial value(6.3V, 10V : ±30%)							
Endurance	105°C rated voltage applied (With the rated ripple current)	tanδ	Less than 200% of the specified value							
		LC	Less than the specified value							

Dimensions



	(Unit : mm)			
φD	8	10	12.5	16
F	3.5	5.0	5.0	7.5
φd	0.6	0.6	0.6★	0.8

★φ12.5×30:φd=0.8

Size, Impedance, Rated Ripple Current

Case size φD×L(mm)	Items	6.3			10		
		Capacitance (μF)	Impedance (Ωmax.) (20°C/100kHz)	Rated ripple current (mA _{rms}) (105°C/100kHz)	Capacitance (μF)	Impedance (Ωmax.) (20°C/100kHz)	Rated ripple current (mA _{rms}) (105°C/100kHz)
8×11.5		820	0.059	945	680	0.059	945
8×15	★1	1200	0.046	1250	★1 1000	0.046	1250
8×20		1500	0.031	1500	★1 1500	0.031	1500
10×12.5		1200	0.043	1330	1000	0.043	1330
10×16		1800	0.030	1760	1500	0.030	1760
10×20		2200	0.021	1960	1800	0.021	1960
10×22		2700	0.020	2250	2200	0.020	2250
12.5×20		3900	0.019	2480	3300	0.019	2480
12.5×25		4700	0.016	2900	3900	0.016	2900
12.5×30		5600	0.014	3450	★1 4700	0.014	3450
16×21		6800	0.018	3250	4700	0.018	3250
16×25		8200	0.014	3630	6800	0.014	3630

★1 WAL



- ME-SWB
- ME-UZ-SZ
- ME-UAX-SAX
- ME-SWG
- ME-HC
- ME-LS
- ME-CZ
- ME-CA
- ME-CX
- ME-AX
- ME-WX
- ME-WA
- ME-WL
- ME-WG
- ME-FX
- ME-PX
- ME-HPC-HPD
- ME-FC-FD
- ME-FH
- ME-SWN
- ME-HWN

Size, Impedance, Rated Ripple Current

Case size φD×L(mm)	Items	16			25		
		V	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)
8×11.5		470	0.059	945	330	0.059	945
8×15	★1	680	0.046	1250	390	0.046	1250
8×20	★1	1000	0.031	1500	560	0.031	1500
10×12.5		680	0.043	1330	470	0.043	1330
10×16		1000	0.030	1760	680	0.030	1760
10×20		1500	0.021	1960	820	0.021	1960
10×22		1800	0.020	2250	1000	0.020	2250
12.5×20		2200	0.019	2480	1500	0.019	2480
12.5×25		2700	0.016	2900	1800	0.016	2900
12.5×30	★1	3300	0.014	3450	★1 2200	0.014	3450
16×21		3300	0.018	3250	2200	0.018	3250
16×25		4700	0.014	3630	3300	0.014	3630

Case size φD×L(mm)	Items	35			50		
		V	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)	Rated ripple current(mArms) (105°C/100kHz)	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)
8×11.5		220	0.059	945	100	0.074	724
8×15		270	0.046	1250	120	0.061	950
8×20		390	0.031	1500	180	0.046	1190
10×12.5		330	0.043	1330	150	0.061	979
10×16		470	0.030	1760	220	0.042	1370
10×20		560	0.021	1960	270	0.030	1580
10×22		680	0.020	2250	330	0.028	1870
12.5×20		1000	0.019	2480	470	0.027	2050
12.5×25		1200	0.016	2900	560	0.023	2410
12.5×30	★1	1500	0.014	3450	680	0.021	2860
16×21		1500	0.018	3250	820	0.023	2730
16×25		2200	0.014	3630	1000	0.021	3010

Case size φD×L(mm)	Items	63		
		V	Capacitance (μF)	Impedance(Ωmax.) (20°C/100kHz)
8×11.5		82	0.22	525
8×15		100	0.16	688
8×20		150	0.12	861
10×12.5		120	0.15	725
10×16		180	0.11	998
10×20		270	0.078	1200
12.5×20		390	0.060	1570
12.5×25		470	0.043	1990
12.5×30	★1	560	0.035	2410
16×21		560	0.043	2100
16×25		820	0.032	2730

Part number


Please refer to page 14 for ripple current frequency coefficients. ★1 WAL